
# ecoGEO+ Basic

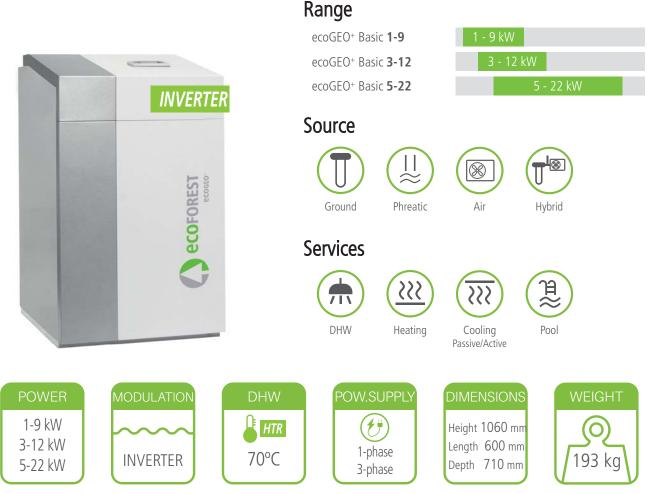


Ground source Heat Pump

### Features


- Inverter technology and Scroll compressor
- Ability to modulate thermal power (20-100%) and the speed of the production circulator (20-100%)
- Compact installation: circulation pumps, safety valves and expansion vessels of the integrated primary and secondary circuits. Also includes three-way valve for the production of integrated DHW
- Active Cooling inside (ecoGEO B3 and ecoGEO B4) Passive Cooling inside (ecoGEO B2 and ecoGEO B4)
- Integrated Energy meters

## Production management



- Simultaneous cooling-heating production allowing for unique performances
- HTR technology: Allows DHW production up to 70°C without the need of an electric heater
- Ground source or hybrid collection systems: management of modulating aerothermal units
- Control through Internet
- Possibility of hybridization with photovoltaic energy
- ECOFOREST control strategies developed by our R&D

### Cascade







# ecoGEO+ **Basic**



Inverter technology and Scroll compressor

Power ranges: 1-9 kW / 3-12 kW / 5-22 kW

Domestic hot water production with external DHW tank

Production of heating and swimming pool

Integrated production of active cooling

Integrated production of passive cooling (free cooling)

Control throught Internet with the ecoSMART Easynet

Integrated photovoltaic hybridisation

HTR technology for the production of domestic hot water up to 70  $^\circ$  C.

Integrated cascade control up to 3 units

Single-phase (230V) or three-phase (400V) power supply

ecoGEO+ B1

DHW Heating

### ecoGEO<sup>+</sup> B2

DHW Heating Passive Cooling

### ecoGEO<sup>+</sup> B3

DHW Heating Active Cooling

#### ecoGEO+ B4

DHW Heating Passive Cooling Active Cooling

